

Power LAB products

RPL00 fuse enclosures



- AC&DC applications
- V0 fire resistance class

- Quick installation
- Compact design



Safety

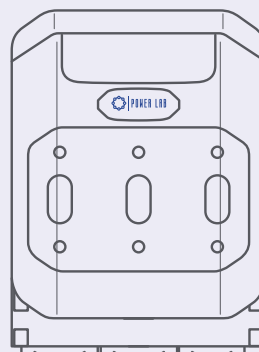


Flexible adjustment



Cost savings

RPL00 fuse enclosures

**RPL00**

Insert size	NH00	
Rated voltage U_e [V]	AC380	AC660
Rated current I_e [A]	160	100
Rated thermal current I_{th} [A]	160	100
Rated short-time withstand current [kA]	100	50
Rated insulation voltage U_i [V]	800	
Rated impulse withstand voltage U_{imp} [kV]	8	
Service category	AC-23B AC-22B AC-21B AC-20B	
Electrical life [cycles]	200	

Dimensions [mm]

