SOLAR PANEL

MONOCRYSTALLINE

200W MAXX

40 cells
Monocrystalline

200w
Maximum power



MAXX

TECHNICAL DATA

INDEX	P01766
MODEL TYPE	200W MAXX
Peak Power (Pmax) [W]	200
Maximum Power Voltage (Vmp) [V]	23,20
Maximum Power Current (Imp) [A]	8,63
Open Circuit Voltage (Voc) [V]	27,95
Short Circuit Current (Isc) [A]	9,26
Maximum System Voltage	500VDC(IEC)
Power Tolerance	+3%
Cell Type	Monocrystalline
Dimensions [mm]	1100*890*30
Weight [kg]	10,2
Outputcables	2x4mm² MC4
Warranty	5 years
Bus Bar	12BB
Junction box	IP67
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

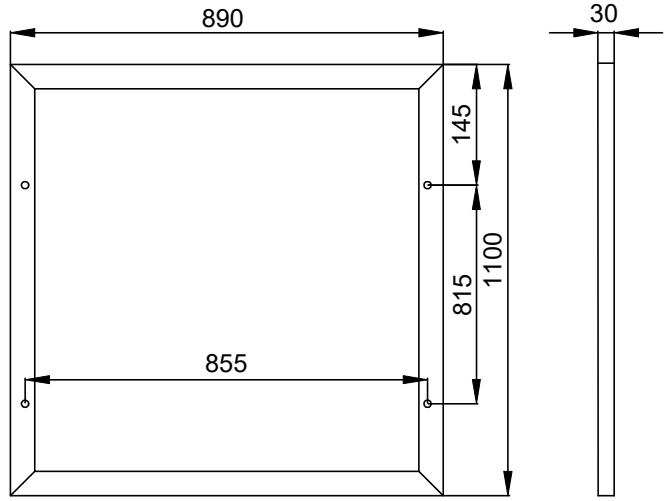

The dimensions given are measured to the center of the mounting hole.
Differences between individual batches may be ±5mm.

ISO9001
ISO14001
OHSAS18001
IEC TS 62941

CHARACTERISTIC

current-voltage



power-voltage



The electrical parameters listed on the product label may differ slightly from the specifications.

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu