SOLAR PANEL
MONOCRYSTALLINE
200W BF MAXX
BIFACIAL

36 cells
Monocrystalline


200W
Maximum power



TECHNICAL DATA


INDEX	P0222
MODEL	200W BF Bifacial
Peak Power (Pmax) [W]	200
Maximum Power Voltage (Vmp) [V]	20,9
Maximum Power Current (Imp) [A]	9,57
Open Circuit Voltage (Voc) [V]	25,1
Short Circuit Current (Isc) [A]	10,34
Maximum System Voltage	1000VDC(IEC)
Power Tolerance	+3W
Cell Type	Monocrystalline
Dimensions [mm]	1340x670x30
Weight [kg]	10
Output cables	90cm 2x4.0mm² MC4
Warranty	5 years
Bus Bar	12BB
Junction box	IP65
Front Glass (tempered glass)	3,2mm
Frame	black

TECHNICAL DRAWING (mm)

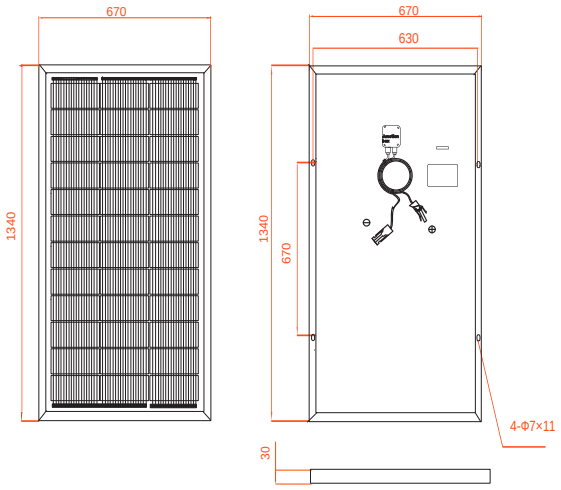

The dimensions given are measured to the center of the mounting hole.
Differences between individual batches may be ±5mm.

CHARACTERISTIC

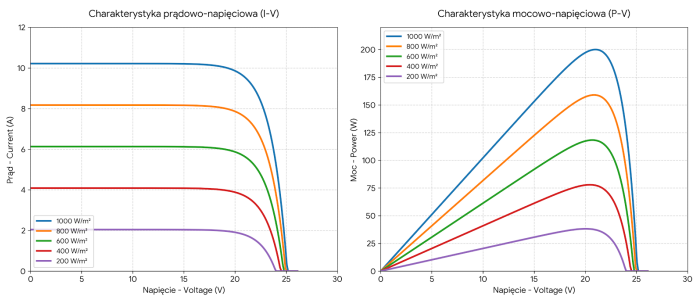

ISO9001
ISO14001
OHSAS18001
IEC TS 62941

Images are for illustrative purposes only. The actual appearance of the product may differ slightly from the images shown.

The electrical parameters listed on the product label may differ slightly from the specifications.

4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu